PRODUCT DATA SHEET

1300 SERIES

Aluminum Louvers

Overview

All-aluminum louvers with inverted, self-attaching V-blades and 60% free area. Recommended for humid environments or buildings where all-aluminum construction is desired.

Construction

V-blades with 1/2-inch spacing interlock with a 1-1/16-inch-deep welded frame.

The self-attaching frame has 1-1/4-inch trim and mitered, welded corners. Screws pass through the frame into the louver core, leaving the corridor side free of fasteners.

Multiple sections can be combined for larger sizes.

Door Compatibility

1-3/4-inch doors: Any style.
1-3/8 to 1-3/4-inch doors: 1300CORE, 1300C and 1300A.


Door cutout equals the order size.



Product Specifications

Material	0.050-inch aluminum
Finish	Satin aluminum powder coat
Minimum size	6 in. x 4 in.
Maximum size	24 in. x 80 in.
Free area	60%
Blade spacing	1/2 in.
Frame depth	1-1/16 in.
Trim	1-1/4 in.
Fasteners	#8 x 3/4-inch Phillips head screws

Section Detail

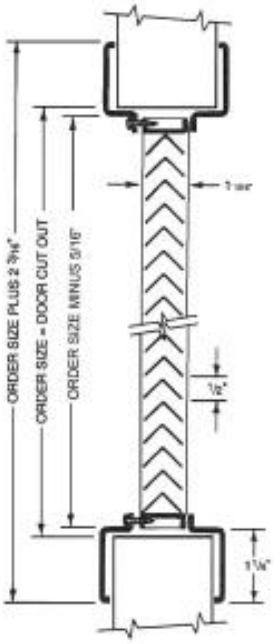

323-263-9383 | 1353 Philadelphia St. #101 | Pomona, CA 91766
sales@m5steel.com
m5steel.com