PRODUCT DATA SHEET

LOW PROFILE


Dormer

Overview


Handcrafted to project specifications for ventilation or as an architectural roof element. Available in galvanized steel, bonderized steel, Galvalume and copper.

Roof and Vent Options

1/4-inch screen; louver blades available.
Designed for composition, shake and flat-tile roofs.
Dead-soft aluminum is available for Spanish or S-tile roofs.

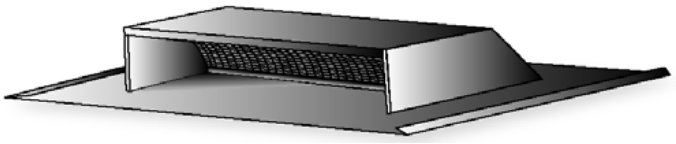

Front Detail

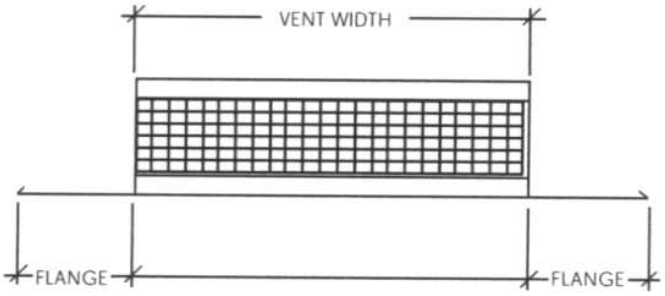

Materials

ASTM A653 galvanized steel - 26 or 24 ga.
ASTM A653 bonderized steel - 26 or 24 ga.
ASTM A792 AZ55 Galvalume - 26 ga.
Copper - 16 oz. or 20 oz.

Installation

Center the dormer over the roof opening and fasten it to the substrate. Sub-flashing is recommended and sold separately.

Dormer Sizes

Part No.	Width	Length	Height	Flange	Net Free Air
CV50	-	-	-	-	Contact sales
CV100	17 in.	17 in.	8 in.	5 in.	100
CV200	23 in.	17 in.	8 in.	5 in.	200

Contact sales for CV50 dimensions and net free air.

Sub-flashings sold separately.

323-263-9383 | 1353 Philadelphia St. #101 | Pomona, CA 91766
sales@m5steel.com
m5steel.com