PRODUCT DATA SHEET

LOUVERS

Square Top

Overview

Fixed-blade louvers are designed for vertical wall installation and allow airflow through attic and wall spaces. Standard louvers include a 1/4-inch insect screen.

Flange Configurations

P/G - Plaster ground

FOB - Flange on back

F/F - Flange on front

Materials


ASTM A653 galvanized steel
ASTM A653 bonderized steel
ASTM B370 sheet copper - 16 oz. or 20 oz.
3003-H14 aluminum

Installation and Use

Louvers may be nailed or riveted using conventional hand or power tools. Fasten flashing to the substrate with wood or metal screws.

Recommended for exhaust of warm, dry air. **Not intended for venting grease or liquid.**

Louver Detail

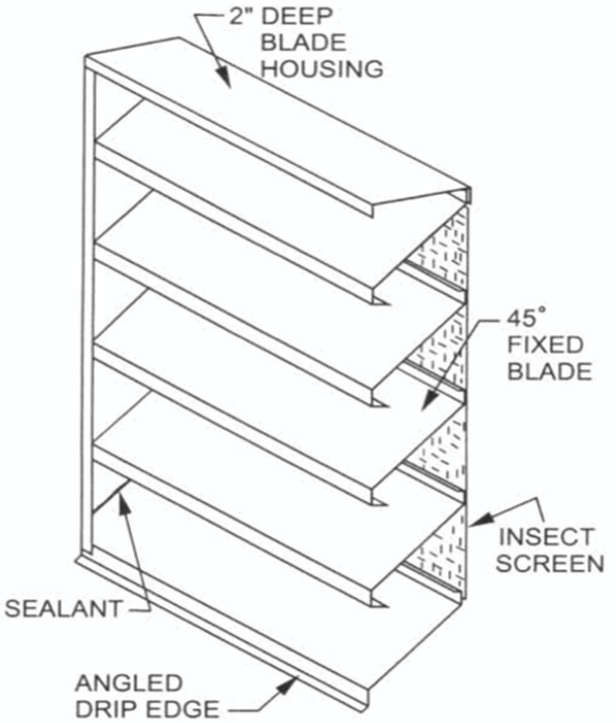

87 in.



88 in.

LX8788 - size shown

Louver Sizes

Part No.	Width (in.)	Height (in.)	Net Free Air
LX8788	87	88	3,200
LX2010	20	10	85
L1418_ _	14	18	110
L1424_ _	14	24	147
L1430_ _	14	30	185
LX1824	18	24	190
LX2424	24	24	253

Additional sizes available. Contact sales for details.

323-263-9383 | 1353 Philadelphia St. #101 | Pomona, CA 91766
sales@m5steel.com
m5steel.com